

NEW Uniform 360° airflow cassette air conditioner is setting tomorrow's standards.



Heat pump
FCQ71/100/125/140

ROUND FLOW

Standard
Accessory required for indoor unit

Wired LCD remote controller with weekly schedule timer
BRC1D61
Note: Remote controller cable not included. Cables must be procured locally.

Option
Wireless LCD remote controller
A signal receiver must be added to the indoor unit.
Heat pump BRC7F632F
Signal receiver unit (Installed type)
Wireless remote controller and signal receiver unit are sold as a set.

Avoids ununiform temperature and uncomfot caused by drafts.
Comfort enhanced by new airflow!


- 360° airflow
 - Air movement is gentle with Round Flow
- With uniform temperature distribution Enhanced Comfort



If you raise the set temperature by 1 to 1.5°C in cooling (and lower in heating), and velocity is decreased by 25%, You still obtain the same feeling temperature and comfort.

Easily adapts to the installation space.


- Because air flows out of corner outlets, comfort is more widely spread than before.

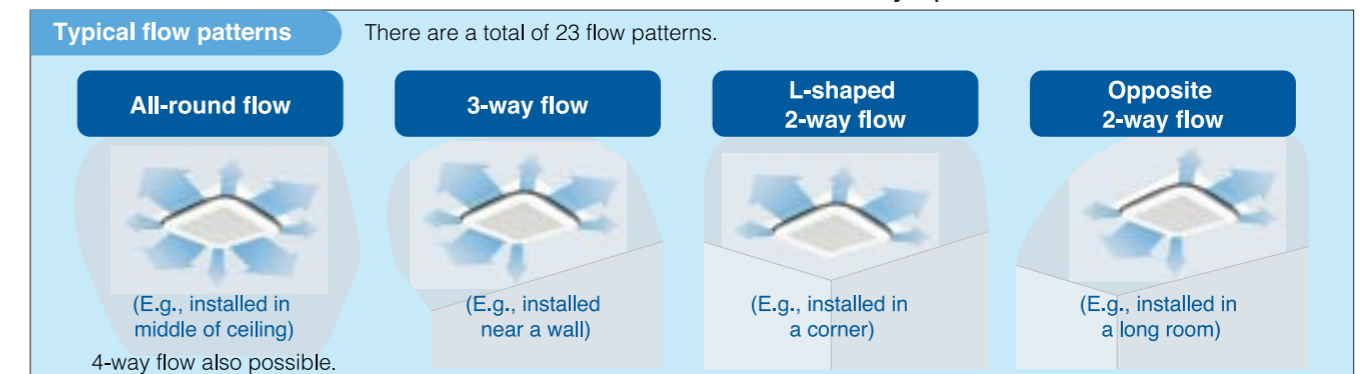

Note: Whatever the discharge direction, the same type of panel is used. If installing for other than all-round flow, an air discharge outlet sealing member (option) must be used to close each unused outlet.

Grime prevention and bactericidal coating: Cleanly performance improved.
External panels are treated with a new coating that repels dirt.

- To prevent dirt sticking to the external panels, they have been coated with a new surface treatment.

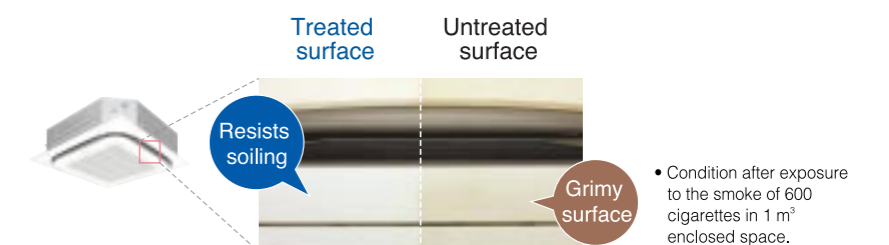

- New bactericidal treatment for drain pan
Anti bacterial treatment, that includes silver ions is used which may assist in preventing the growth of microorganisms that cause smells and clogging.
- Non-flocking horizontal louvres
Dew does not easily form on and dirt does not cling to non-flocking louvres. Less cleaning is needed because minimal dirt is attracted.
- Filter has anti-mould and bactericidal treatment
Prevents mould and microorganisms growing out of the dust and moisture that adheres to the filters.

Features

Feature	Comfort										Mould prevention	Work & Servicing				Control features				Option		Others								
	Auto swing	Swing pattern selection	Draft prevention function	Switchable fan speed	Programme "Dry"	High ceiling application	Two selectable thermo-sensors	Hot start	Year-round cooling applicable	Timer selector		Mould-resistant treatment for filter	Drain water lift-up mechanism	Pre-charged for up to 30 m	Long-life filter	Filter sign	Ceiling soiling prevention	Low gas pressure detection	Emergency operation	Self-diagnosis function	Auto-restart		Auto-cooling/heating change-over	Control by 2 remote controllers	Control by 1 remote controller	External command control	Central remote control	Interlock control	Ultra long-life filter	High-efficiency filter
Model	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Heat pump	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

**Applicable when wired remote controller is used